

G2

Fingerprint Time Attendance & Access Control Terminal



G2 fingerprint identification terminal features ZKTeco's innovative Silk ID fingerprint sensor. With 3D Neuron Fingerprint Verification Sensor-Activation and Anti-Interference technology, it precisely detects dry, wet, and rough fingerprints, and operates well under strong sunlight environment. With the latest core-board, the fingerprint capacity is enlarged to 20,000.

Features



Modern Design & Interactive UI



Revolutionary SilkID Fingerprint Sensor





Multiple Verification Modes: Fingerprint / Card / Password



Outstanding Performance With Dry, Wet and Rough Fingers



Optional Wi-Fi or 3G

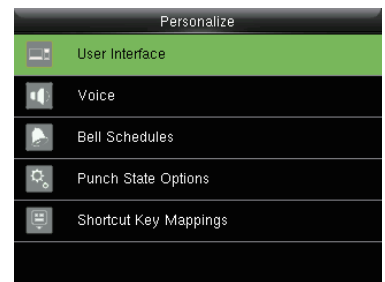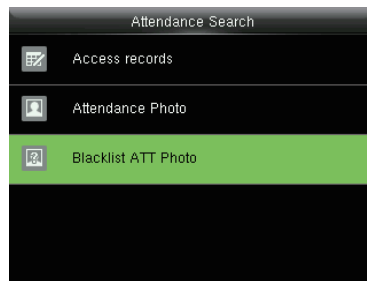

Specifications (G: GL Exclusive Feature)

Capacity

Fingerprints	20,000 (Standard)
	40,000 (Optional)
Cards	20,000
Transactions	200,000

Communication

TCP/IP
USB Host
Wiegand Input / Output

Access Control Interface

Lock Relay Output
Alarm Output
Exit Button
Door Sensor
External Bell Output

Hardware

G 1.2GHz High Speed CPU
G Memory 128MB RAM / 256MB Flash
SilkID Fingerprint Sensor
3.5 Inches TFT-LCD Screen
Hi-Fi Voice & Indicator
Tamper Switch Alarm

Standard Functions

ID Card / Work Code / WDMS
DST / SMS / Bell Schedule
Attendance Status Auto-Switch
Record Query / Photo ID
Anti-Passback
Custom Wallpaper & Screen Saver

Optional Functions:

HID Proxy / Mifare Card Reader
External Printer
G Wi-Fi / 3G

Special Functions

G Multiple Verification Modes
G Alive Finger Detection

Compatibility

ZKTime.Web
ZKTime.Net 3.0
WDMS


Additional Info

Working Temperature: 0 °C ~ 45 °C
Dimensions: 206.0 × 153.0 × 42.9 mm
Fingerprint Algorithm ZKFinger v10.0
FAR ≤ 0.0001% FRR ≤ 0.01%


Power

Operating Voltage 12V DC
Current Draw < 500 mA

Configuration

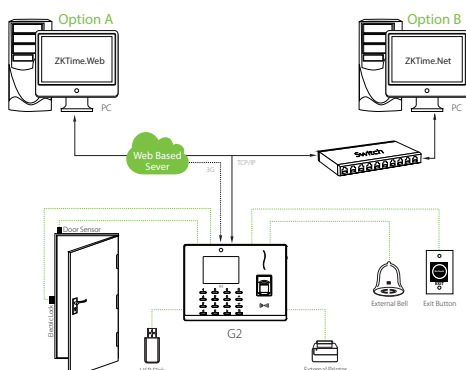

Dimensions (mm)

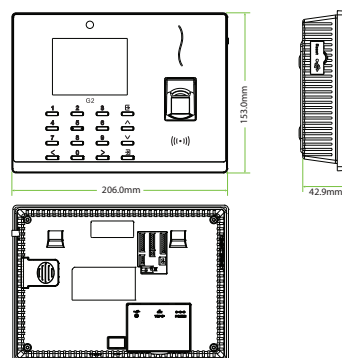

ZKTeco Inc.
www.zkteco.com
E-mail: sales@zkteco.com



© Copyright 2016. ZKTECO CO., LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.